



Item No.	NPS	Dimensions(Inch)											
		A	C	D	E	F	G	B	H	J	K	L	ØS
KPL150-GH30	30"	51.00	26.57	30.12	5.12	38.75	36.00	2.12	1.375	20	1.25-7UNC	8	27.5
KPL150-GH36	36"	60.00	30.91	34.41	5.47	46.00	42.75	2.38	1.625	24	1.5-6UNC	8	27.5
KPL150-GH42	42"	72.00	37.40	43.26	6.77	53.00	49.50	2.62	1.625	32	1.5-6UNC	4	35.5
KPL150-GH48	48"	84.00	44.10	49.97	7.36	59.50	56.00	2.75	1.625	40	1.5-6UNC	4	31.5
KPL150-GH54	54"	96.00	43.31	50.70	7.36	66.25	62.75	3.00	2.000	40	1.75-5UNC	4	31.5

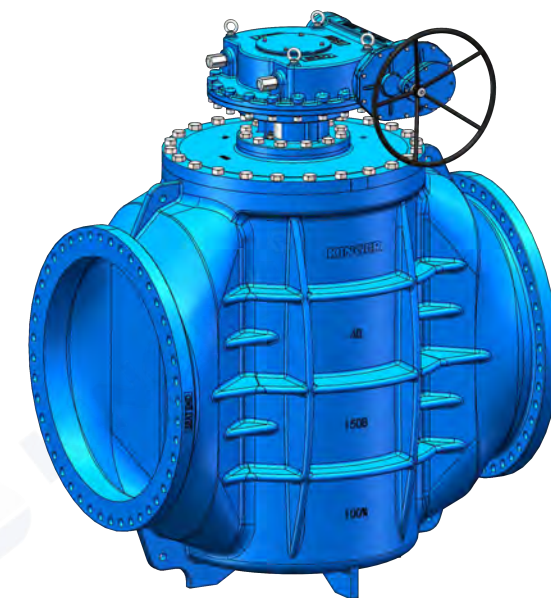

48"-54"

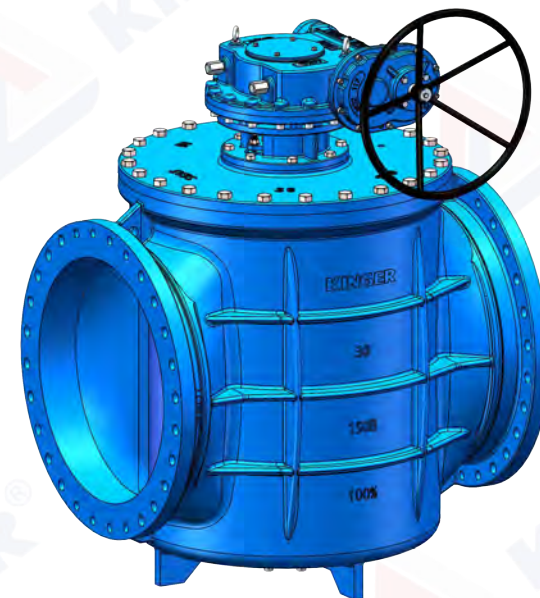

30"-42"




NOTES:

1. ALL DIMENSIONS ARE IN INCHES ;
2. DESIGN STANDARD PER AWWA C517 ;
3. FLANGE STANDARD PER ASME B16.1 CLASS125 ;


Part No.	Description	Material Specification
1	Body	Ductile Iron ASTM A536 65-45-12+95% Ni
2	Plug	DI ASTM A536 65-45-12+NBR ASTM D2000
3	Bonnet	Ductile Iron ASTM A536 65-45-12
4	Bonnet Bolts	Stainless Steel SS316
5	O-Ring	NBR ASTM D2000
6	Adapter	Ductile Iron ASTM A536 65-45-12
7	Upper Thrust Washer	PTFE
8	Upper Grit Exuluder Seal	NBR ASTM D2000
9	Upper Shaft Bearing	Stainless Steel SS316
10	V Packing	NBR ASTM D2000
11	Gland	Ductile Iron ASTM A536 65-45-12
12	Gland Fastener	Stainless Steel SS316
13	Bottom Cover	Ductile Iron ASTM A536 65-45-12
14	Bottom Cover O-Ring	NBR ASTM D2000
15	Bottom Cover Bolts	Stainless Steel SS316
16	Lower Shaft Bearing	Stainless Steel SS316
17	Lower Grit Exuluder Seal	NBR ASTM D2000
18	Lower Thrust Washer	C95400
19	Pipe Plug	Stainless Steel SS316

DESCRIPTION		Pro j.	KPL150-GH-30/54
AWWA C517 Flanged Eccentric Plug Valve		DWG#	REV.
		KPL-004	1
		DWN	DATE
		CINDY	KUHN 9/23/2021

CUSTOMER		 KINGER INDUSTRY INC.
PAGE NO.	1 of 1	
		KINGER RESERVES THE RIGHT TO CHANGE DESIGN & MATERIAL WITHOUT PRIOR NOTICE PLEASE CONNECT KINGER FOR UPDATED DATA BEFORE PLACING THE ORDER.

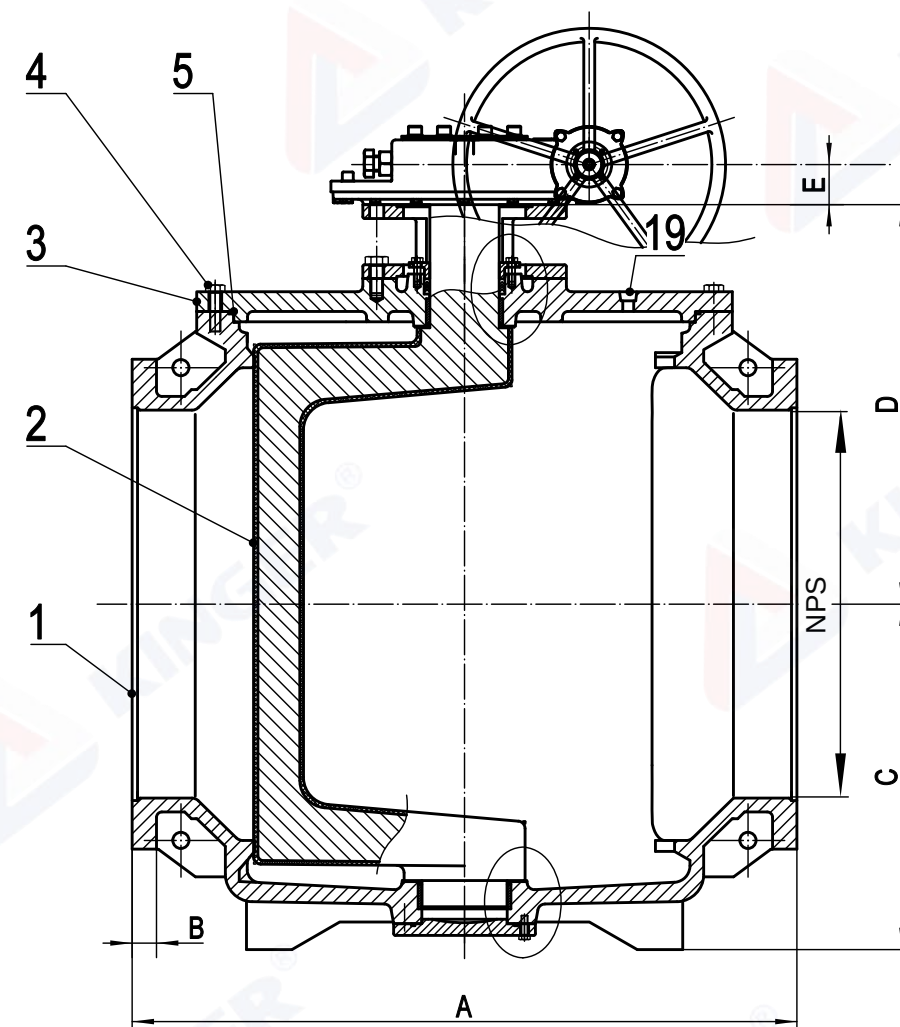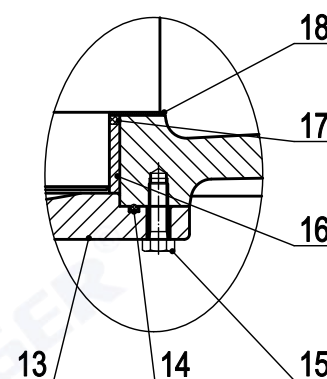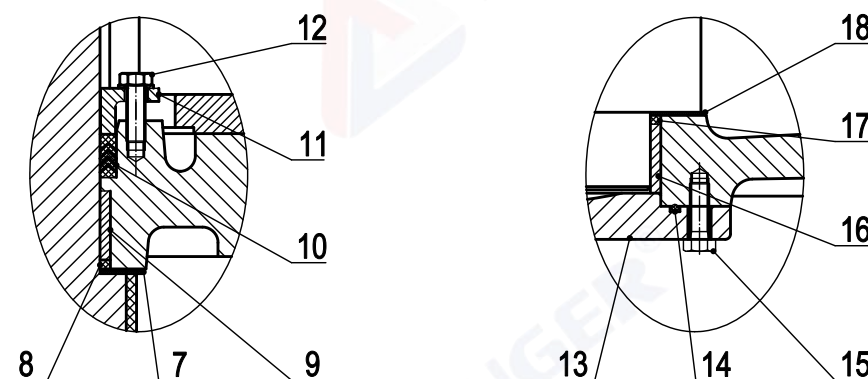

K-SIZE OF TAPPED HOLES
L-NO. OF TAPPED HOLES

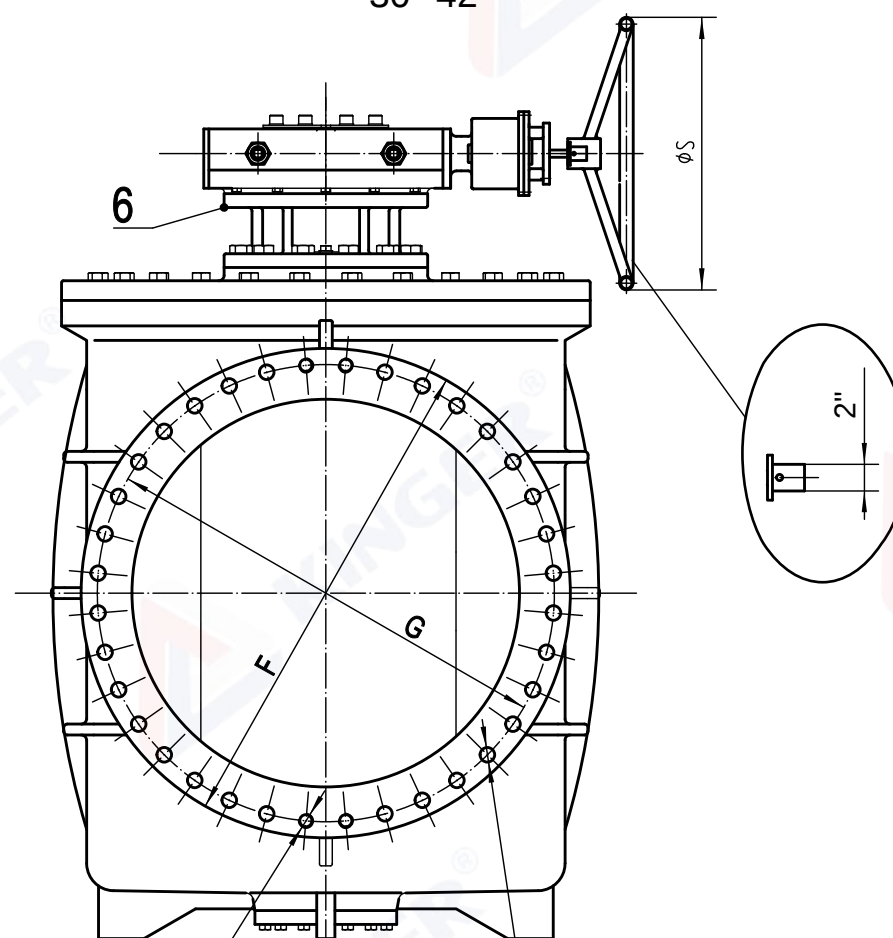

H-DIA. OF HOLES
J-NO. OF HOLES