

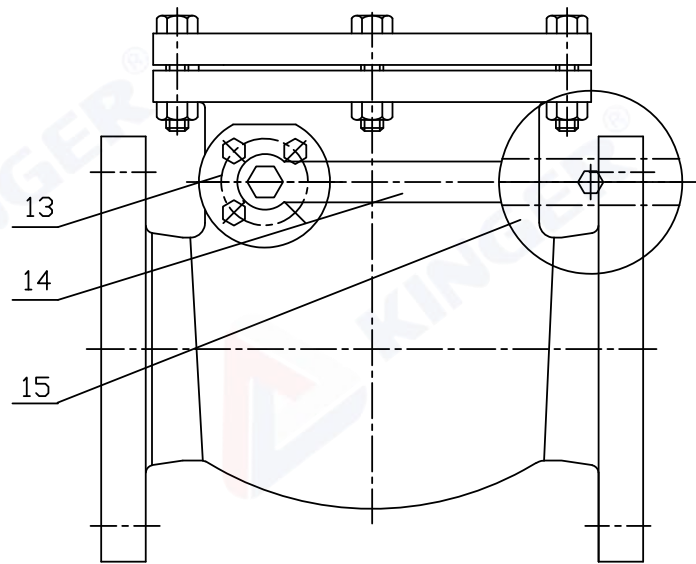
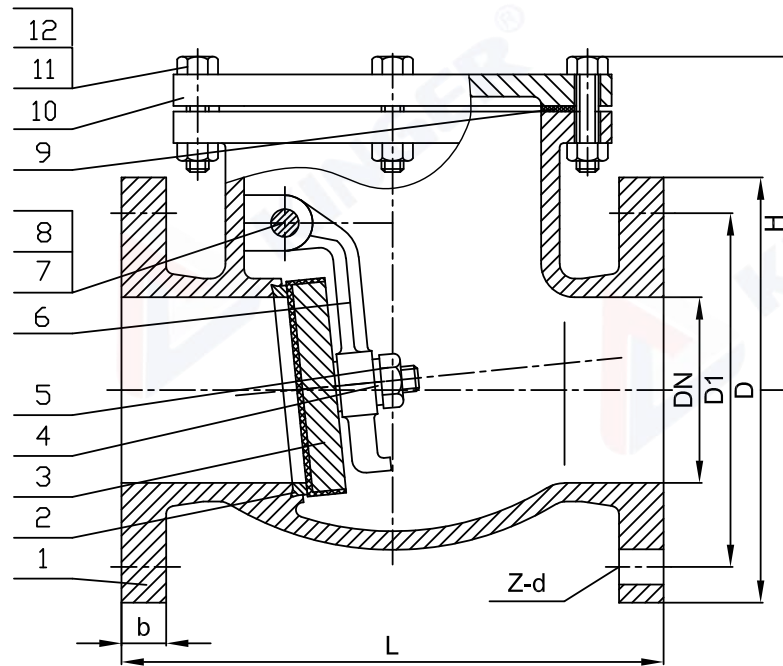


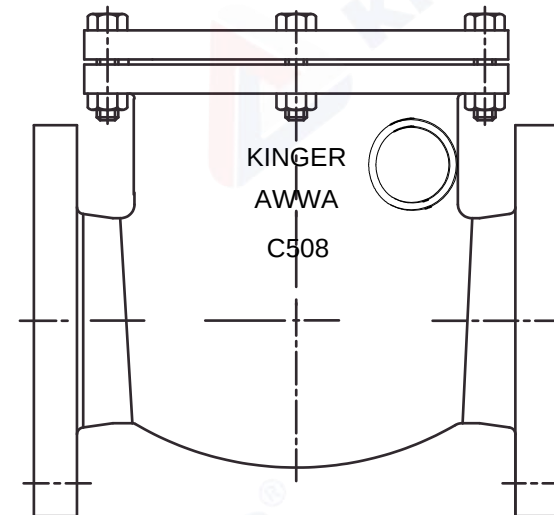

APPLICABLE STANDARD	
Design&Manufacture	AWWA C508
End Connection	ASME B16.1 CL125/ ASME B16.42 CL150
Face-to-Face and End-to-End Dimensions	AWWA C508
Working Temperature	32°F -176°F
Medium	Water

TESTING DETAILS	
DESCRIPTION	TEST PRESSURE
SHELL TEST	500PSI
SEAT TEST	250PSI

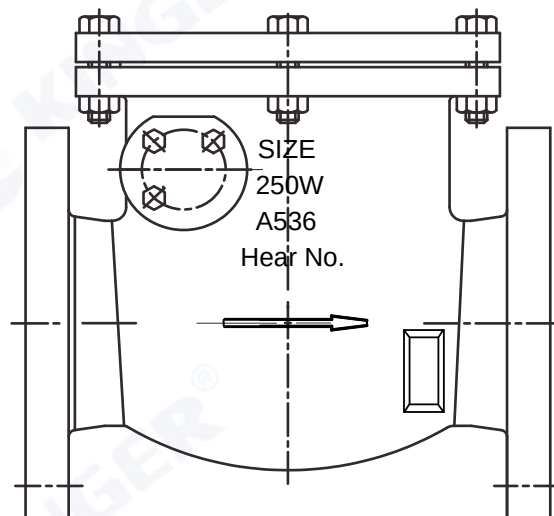

Item No.	Dimensions (Inch)							
	Size	D	D1	b	z	d	L	H
JKHCV-F250-LW015	1.5"	5.00	3.88	0.56	4	0.625	6.50	4.72
JKHCV-F250-LW02	2"	6.00	4.75	0.62	4	0.750	8.00	5.39
JKHCV-F250-LW025	2.5"	7.00	5.50	0.69	4	0.750	8.50	5.63
JKHCV-F250-LW03	3"	7.50	6.00	0.75	4	0.750	9.50	6.06
JKHCV-F250-LW04	4"	9.00	7.50	0.94	8	0.750	11.50	6.73
JKHCV-F250-LW05	5"	10.00	8.50	0.94	8	0.875	13.00	8.03
JKHCV-F250-LW06	6"	11.00	9.50	1.00	8	0.875	14.00	8.62
JKHCV-F250-LW08	8"	13.50	11.75	1.12	8	0.875	19.50	10.16
JKHCV-F250-LW10	10"	16.00	14.25	1.19	12	1.000	24.50	11.42
JKHCV-F250-LW12	12"	19.00	17.00	1.25	12	1.000	27.50	12.80
JKHCV-F250-LW14	14"	21.00	18.75	1.38	12	1.125	31.00	14.21
JKHCV-F250-LW16	16"	23.50	21.25	1.44	16	1.125	36.00	15.28
JKHCV-F250-LW18	18"	25.00	22.75	1.56	16	1.250	40.00	17.72
JKHCV-F250-LW20	20"	27.50	25.00	1.69	20	1.250	40.00	20.39
JKHCV-F250-LW24	24"	32.00	29.50	1.88	20	1.375	48.00	24.41
JKHCV-F250-LW30	30"	38.75	36.00	2.12	28	1.375	56.00	30.04
JKHCV-F250-LW36	36"	46.00	42.75	2.38	32	1.625	77.00	37.80

Part No.	Description	Material Specification	
1	Body	Ductile Iron ASTM A536	
2	Body Seat Ring	Brass ASTM B16	
3	Disc	DI ASTM A536+EPDM ASTM D2000	
4	Washer	Stainless Steel SS316	
5	Nut	Stainless Steel SS316	
6	Arm	Ductile Iron ASTM A536	
7	Hing Pin	Stainless Steel SS420	
8	O-Ring	EPDM ASTM D2000	
9	Gasket	EPDM ASTM D2000	
10	Bonnet	Ductile Iron ASTM A536	
11	Bolt	Stainless Steel SS316	
12	Nut	Stainless Steel SS316	Size:1.5-6" N/A Size:8-36" A
13	Gland	Brass ASTM B16 Ductile Iron ASTM A536	Size:1.5-4" Size:5-36"
14	Hinge	Ductile Iron ASTM A536	
15	Hammer	Ductile Iron ASTM A536	
DESCRIPTION		Proj.	JKHCV-F250-LW
AWWA C508 Flanged Resilient-Seated Swing Check Valve With Weight&Lever		DWG#	REV.
		JKHCV-003	0
		WN	APPR.
		CINDY	DATE
CUSTOMER		KUHN HU	3-7-2025
PAGE NO		1 of 1	For special material requests beyond the standard specifications, please clearly note them on your inquiry or order form.